



Description

For use as a proximity detection sensor to transmit the occupancy of a location. It includes a pair of AAA batteries and a wireless transmitter (GE, Honeywell, 2GIG, DSC, or Cryptix).

Theory of Operation

The Proximity Detection Sensor has a binary output, either occupied or unoccupied. The distinction between the two states is whether or not a person is within the configured range of the sensor. The Proximity Detection Sensor provides the signal to the owner's monitoring system to indicate occupancy/vacancy. The sensor is closed in the occupied state and open in the vacant state. The output from the sensor can be delayed from as little as 1 second. The range from the sensor can be as short as 1 foot.

Installation

1. Mount the Proximity Detection Sensor to the wall.
2. Use the DL Code on the box to pair to your system.

Low Battery

A low battery signal is sent when the AAA batteries drop below 2.3 V and need to be replaced.

Telehealth Sensors Inc.
info@telehealthsensors.com

630-879-3101 *The following is proprietary information that Telehealth Sensors Inc. www.telehealthsensors.com requests not be released unless expressly authorized.*

Specifications


Parameter	Typical Val	Unit
PDS Length	3.675	in
PDS Width	3.125	in
PDS Height	1	in
Min Operating Voltage	2.6	V
Max Operating Voltage	3.6	V
Frequency (GE)	319	MHz
Frequency (Honeywell)	345	MHz
Frequency (2GIG)	345	MHz
Frequency (DSC)	433	MHz
Frequency (Cryptix)	433	MHz
Battery Life (2 x AAA)	>2	years
Delay	1, 3, 10	seconds
Range	1-6	ft

Telehealth Sensors Inc.
info@telehealthsensors.com


630-879-3101 *The following is proprietary information that Telehealth Sensors Inc. www.telehealthsensors.com requests not be released unless expressly authorized.*

Physical Dimensions

Front View

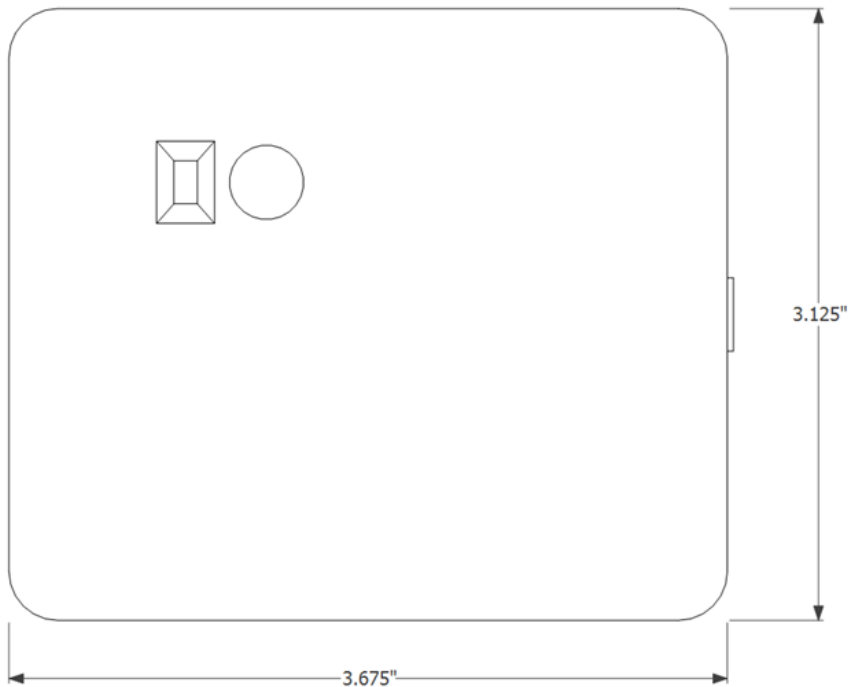

Side View

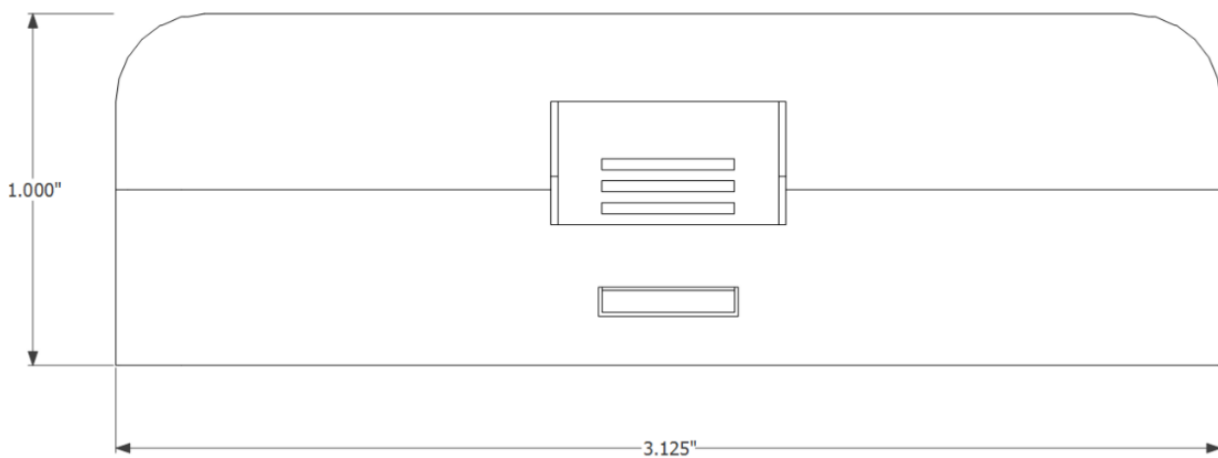

Telehealth Sensors Inc.

info@telehealthsensors.com

630-879-3101 *The following is proprietary information that Telehealth Sensors Inc.*

www.telehealthsensors.com requests not be released unless expressly authorized.